

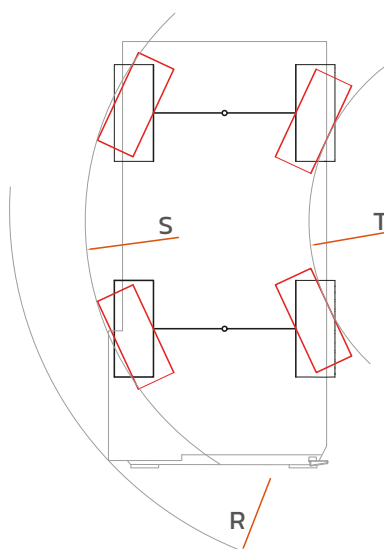


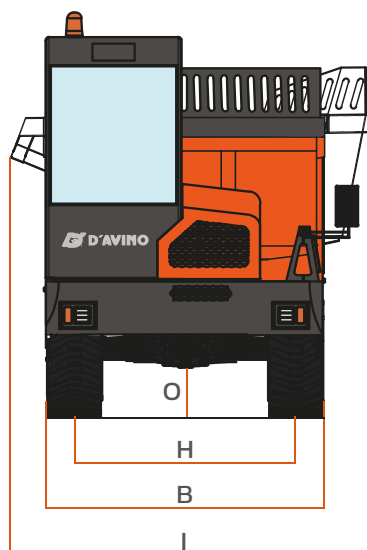

Technical data

GENERAL DATA		120TW	80TW
Max load capacity	kg	12.000	8.000
Dump body water level capacity	l	3.200	2.400
Dump body struck capacity	l	5.100	2.800
Dump body heaped capacity	l	6.000	3.800
Unloading system		Swivel	Swivel
Drivers'seat			
Frame		Fixed	Fixed
Empty weight	kg	7.960	5.080
Transmission		Hydrostatic	Hydrostatic
Cabin		Rops-Fops	Rops-Fops
ENGINE - STAGE V			
Brand		Perkins	Perkins
Model		904J-E36TA	404J-E22TA
Power	kW	90	55
ENGINE - STAGE IIIA			
Brand		Perkins	Perkins
Model		1104D-44TA	1104D-44T
Power	kW	83	74.5
DRIVING			
Max speed	km/h	35	25 (40 opt.)
Gradeability	%	40	40
Turning radius	mm	5150	4450
Traction		AWS	AWS
Tyres		500/60R22.5	405/70-20
Axle oscillation lock		Standard	Optional
HYDRAULIC SYSTEM			
Hydraulic system		Duble gear pump	Duble gear pump
Working pressure	bar	140	185
ELECTRICAL SYSTEM			
Starter motor	V/kW	12/4	12/2
Battery	V/Ah	12/50	12/50
TANK CAPACITY			
Fuel	l	175	140
Hydraulic	l	175	140
BRAKES			
Service		Hydraulic acting on both axles	
Parking		Hydraulic acting on the rear axles	
APPROVALS			
Road approval (Italian)		Yes	Yes

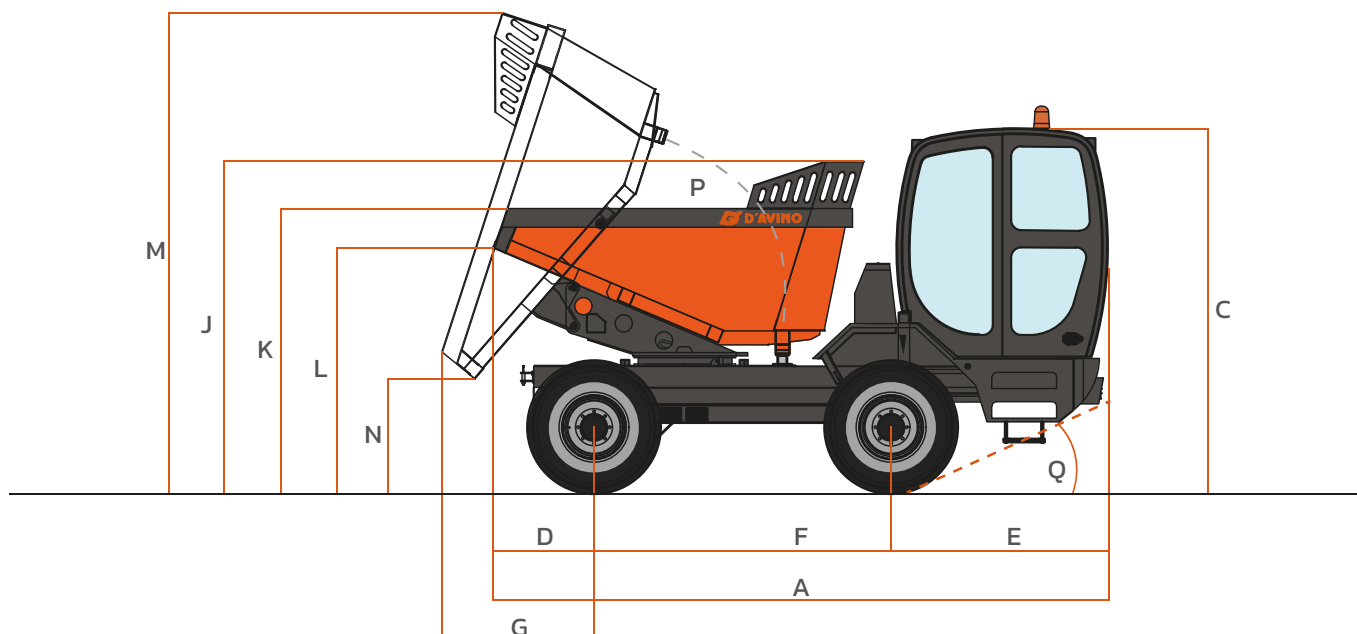

	120TW	80TW
A	5325	4700
B	2500	2250
C	3130	3041
D	885	750
E	1830	1367
F	2580	2500
G	1270	1050
H	1960	1740
I	3255	2430
J	2895	N.A.
K	2445	2266
L	2100	2091
M	4200	3600
N	1010	1350
O	370	380
P	78°	61°
Q	25°	35°
R	5457	5400
S	5010	5000
T	2475	2900